

# Pressure Sensor Combined PST-F 2 350 bar



- ▶ Pressure: 0 to 350 bar
- ▶ Temperature: -40 to 140°C
- ▶ Power supply: 5 V
- ▶ Weight: 36 g

This sensor is designed to measure absolute gasoline pressure and gasoline temperature in direct injection systems

The pressure measurement is based on the expansion of a steel diaphragm, where strain gauges are placed to a Wheatstone bridge. The measured signal is proportional to the pressure and is processed in an application specific integrated circuit.

The temperature measurement is conducted by an NTC thermistor. The main feature of this sensor is its compact design and the integration of two functions (temperature and pressure measurements) in a common housing.

## Application

Application 1	0 to 350 bar
Reference	Absolute
Max. pressure	390 bar
Application 2	-40 to 140°C
Resistance at 25°C	2 kOhm
Operating temp. range	-40 to 140°C
Media temp. range	-40 to 140°C
Storage temp. range	-40 to 60°C
Biofuel compatibility	E26, E85
Max. vibration	210 m/s <sup>2</sup> RMS at 147 to 1,350 Hz 175 m/s <sup>2</sup> RMS at 1,350 to 2,000 Hz

## Technical Specifications

### Mechanical Data

Male thread	M10x1
-------------	-------

Weight without wire	36 g
Wrench size	27 mm
Installation torque	37.5 ± 2.5 Nm
Sealing	Sealed cone

### Electrical Data

Power supply $U_s$	4.75 to 5.25 V
Max power supply $U_s$ max	16 V (18 V for max. 1 h)
Full scale output $U_A$	0.5 to 4.5 V $U_s$ ratiometric
Current $I_s$	12 mA


### Characteristic 1

Response time T10/90	Pressure: 0.2 to 0.8 ms Temperature: 9 s (response time of temperature signal in oil dip bath 20 to 100°C)
Compensated range	-40 to 130°C
Tolerance (FS) at $U_s$	+/- 1 % at 0 to 100°C +/- 1.5 % at -40 to 0°C and 100 to 130°C
Sensitivity at $U_s = 5$ V	11.43 mV/bar
Offset	500 mV at $U_s = 5$ V

### Characteristic 2

T [°C]	R [Ohm]
-40	44,864
-30	25,524
-20	15,067
-10	9,195
0	5,784
10	3,740


20	2,480
25	2,038
30	1,683
40	1,167
50	825
60	594
70	434,9
80	323,4
90	244
100	186,6
110	144,5
120	113,3
130	89,8
140	71,9

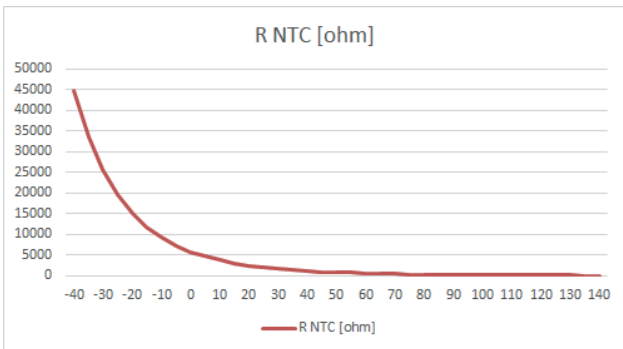

**Connectors and Wires**

Connector	Bosch Trapezoid
Mating connector	F02U.B00.751-01
Pin 1	-

**Dimensions**

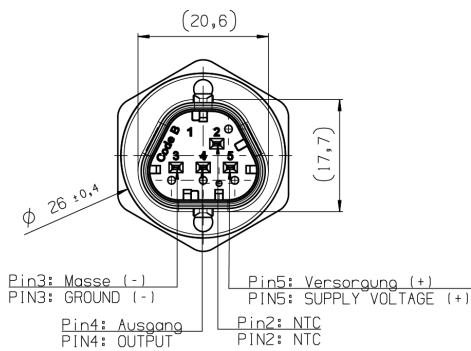

Pin 2	Temperature Signal
Pin 3	Ground
Pin 4	Pressure Signal
Pin 5	Power Supply

Various motorsport and automotive connectors are available on request.

**Installation Notes**

The sensor can be connected directly to most control units.

For temperature measurement please use a pull-up resistor with an optimal value of 4.6 kOhm.

The sensor has a protection for overvoltage, reverse polarity and short-circuit.

Please find further application hints in the offer drawing and free download of the sensor configuration file (\*.sdf) for the Bosch Data Logging System at our homepage.

**Safety Note**


The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

**Legal Restrictions**

Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

**Ordering Information**

**Pressure Sensor Combined PST-F 2 350 bar**  
Order number **0261.B35.596-01**

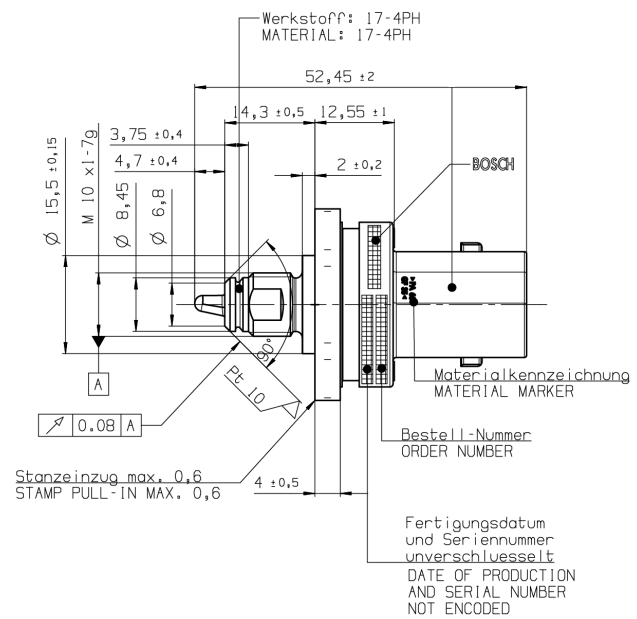

**Represented by:**

**Europe:**

Bosch Engineering GmbH  
Motorsport  
Robert-Bosch-Allee 1  
74232 Abstatt  
Germany  
Tel.: +49 7062 911 9101  
Fax: +49 7062 911 79104  
motorsport@bosch.com  
www.bosch-motorsport.de

**North America:**

Bosch Engineering North America  
Motorsport  
38000 Hills Tech Drive  
Farmington Hills, MI 48331-3417  
United States of America  
Tel.: +1 248 876 2977  
Fax: +1 248 876 7373  
motorsport@bosch.com  
www.bosch-motorsport.com

**Asia-Pacific:**

Bosch Engineering Japan K.K.  
Motorsports Department  
1-9-32 Nakagawa Chuo, Tsuzuki-ku  
Yokohama City  
Kanagawa Prefecture 224-8601  
Japan  
Tel.: +81 45 605 3032  
Fax: +81 45 605 3059  
www.bosch-motorsport.jp

**Australia, New Zealand and South**

**Africa:**  
Robert Bosch Pty. Ltd  
Motorsport  
1555 Centre Road  
Clayton, Victoria, 3168  
Australia  
Tel.: +61 (3) 9541 3901  
motor.sport@au.bosch.com