

# Temperature Sensor NTC M5-HS



- ▶ Application: -55 to 300°C
- ▶ Accuracy at 25°C:  $\pm 0.3^{\circ}\text{C}$
- ▶ Accuracy at 100°C:  $\pm 1.3^{\circ}\text{C}$
- ▶ Male thread: M5
- ▶ Nominal resistance: 10 kOhm  $\pm 1\%$  (at 25°C)

This sensor is designed to measure temperatures up to 300°C of oil, water, fuel or air. This signal is used as a control value for engine control units or as a measurement value which is logged in a data acquisition system.

The NTC-sensing element has a negative temperature coefficient. This means, that with increasing temperature the conductivity rises and the resistance decreases. To improve a good protection against the ambient temperature, the housing is made of stainless steel and partly filled with an isolation-paste. The main benefit of the sensor is a very compact design and its very short response time.

## Application

Application	-55 to 300°C
Storage temperature range	0 to 100°C
Bio fuel compatibility	-

## Technical Specifications

### Mechanical Data

Male thread	M5
Wrench size	8 mm
Installation torque	8 Nm
Weight w/o wire	6 g
Sealing	O-Ring 4 x 1 mm

### Electrical Data

Characteristic	NTC
Nominal resistance at 25°C	10 kOhm $\pm 1\%$


## Characteristic

Accuracy at 25°C (homogeneous cond.)	$\pm 0.3^{\circ}\text{C}$
Accuracy at 100°C (homogeneous cond.)	$\pm 1.3^{\circ}\text{C}$
Response time tau 63 in still water	< 4 s

## Characteristic Application

T [°C]	R [Ohm]
-55	519,910
-35	158,090
-20	71,668
-10	44,087
0	27,936
10	18,187
20	12,136
25	10,000
30	8,284
40	5,774
50	4,103
60	2,967
70	2,182
80	1,629
90	1,234
100	946.6
120	578.1
140	368.8
160	244.4
180	167.6

200	118.5
220	86.08
240	64.08
260	48.76
280	37.86
300	29.94

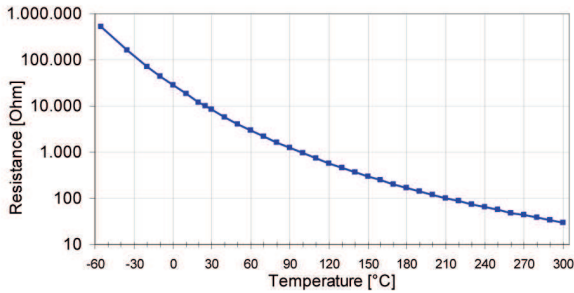

**Connectors and Wires**

Connector	ASL606-05PN-HE
Mating connector	F02U.000.231-01
ASL006-05SN-HE	
Pin 1	-
Pin 2	Sig-
Pin 3	Sig+
Pin 4	-
Pin 5	-
Various motorsport and automotive connectors are available on request.	

Wire size	AWG 24
Wire length L	15 to 50 cm
Please specify the required wire length with your order.	

**Installation Notes**

The NTC M5-HS can be connected directly to most control units using a pull-up resistance (typically 1 or 3 kOhm) .  
 Any mounting orientation is possible.  
 Please find further application hints in the offer drawing at our homepage.  
 Free download of the sensor configuration file (\*.sdf) for the Bosch Data Logging System at our homepage.

**Safety Note**

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.


**Legal Restrictions**

Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

**Ordering Information**

**Temperature Sensor NTC M5-HS**  
 Order number **F02U.V00.510-01**

**Dimensions**

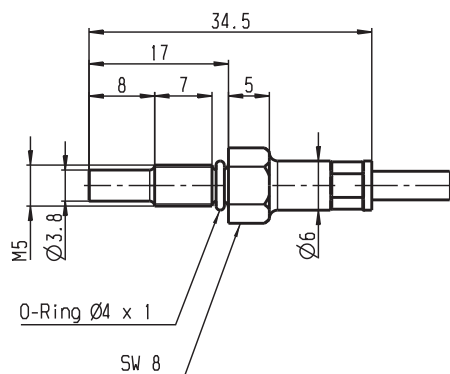

**Represented by:**

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 9101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North America:**  
 Bosch Engineering North America  
 Motorsport  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motorsports Department  
 1-9-32 Nakagawa Chuo, Tsuzuki-ku  
 Yokohama City  
 Kanagawa Prefecture 224-8601  
 Japan  
 Tel.: +81 45 605 3032  
 Fax: +81 45 605 3059  
 www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
 Robert Bosch Pty. Ltd  
 Motorsport  
 1555 Centre Road  
 Clayton, Victoria, 3168  
 Australia  
 Tel.: +61 (3) 9541 3901  
 motor.sport@au.bosch.com