


## Data Logging Accessories

Compact flash cards, adapters and drivers are necessary to use the CardMemory. For some optional functions additional cables and software are on offer.

Compact flash cards are offered with a storage capacity of up to 2048 MB. The compact flash card adapter is used to insert the card to the PCMCIA slot of the PC for data download and card formatting.

In conjunction with the memory C40 Plus, a software tool for additional calibration functions is offered. Together with an individual cable harness it is possible to calibrate further sensors for chassis data logging. To connect memory C40 to the vehicle cable harness the special C40 adapter cable is necessary.

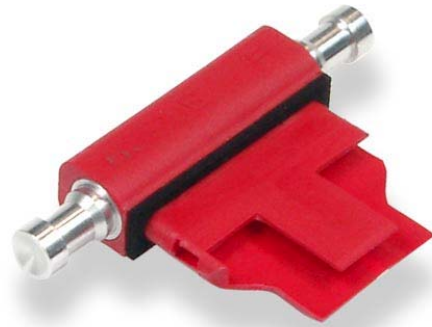

Conditions for Use	
Operating temperature	-40 ... 84 °C
Humidity	5 % to 95 %, non condensing
Vibration	15 g peak to peak
Shock	max. 2.0 g

Part Numbers	
Flash card 128 MB	<b>F 01E B01 105-01</b>
Flash card 256 MB	<b>F 01E B01 106-01</b>
Flash card 512 MB	<b>F 01E B01 107-01</b>
Flash card 1024 MB	<b>F 01E B01 108-01</b>
Flash card 2048 MB	<b>F 01E B01 109-01</b>
Memory adapter (red)	<b>B 261 206 864-01</b>
Flash card adapter	<b>B 261 205 814-01</b>
Software Chassis Adjust	<b>B 261 206 870</b>
C40 adapter cable	<b>B 261 209 433</b>