

Temperature Sensor NTC M12-L



- Application: -40 to 130°C
- Accuracy at 25°C: $\pm 1.4^{\circ}\text{C}$
- Accuracy at 100°C: $\pm 3.4^{\circ}\text{C}$
- Male thread: M12 x 1.5
- Nominal resistance: 2.5 kOhm $\pm 5\%$ (at 20°C)

This sensor is designed to measure air temperature e.g. in the air box or ambient temperature. This signal may be used as a control value for engine control units or as a measurement value which is logged in a data acquisition system.

The NTC sensing element has a negative temperature coefficient. This means, that with increasing temperature the conductivity rises. The sensing element of the temperature sensor is made of semiconducting heavy metal oxide and oxidized mixed crystals, which are equipped with a protective housing.

The main benefit of the sensor is the combination of a high quality production part and a robust and compact design.

Application

Application	-40 to 140°C
Storage temperature range	-30 to 60°C
Bio fuel compatibility	E85/M22
Max. vibration	300 m/s ² at 50 to 250 Hz

Technical Specifications

Mechanical Data

Male thread	M12x1.5
Wrench size	19 mm
Installation torque	15 Nm
Weight w/o wire	24.6 g
Sealing	Not included

Electrical Data


Characteristic	NTC
Nominal resistance at 20°C	2.5 kOhm $\pm 5\%$

Characteristic

Accuracy at 25°C	$\pm 1.4^{\circ}\text{C}$
Accuracy at 100°C	$\pm 3.4^{\circ}\text{C}$
Response time tau 63 in still water	< 10 s

Characteristic Application

T [°C]	R [Ohm]
-40	45,313
-30	26,114
-20	15,462
-10	9,397
0	5,896
10	3,792
20	2,500
30	1,707
40	1,175
50	834
60	596
70	436
80	323
90	243
100	187
110	144
120	113
130	89
140	71

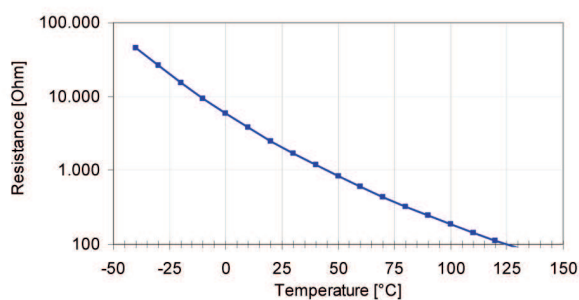

Connectors and Wires

Connector	Bosch Compact
Mating connector	D261.205.288-01
2-pole Jetronic	
Pin 1	SIG+
Pin 2	SIG-

Installation Notes

The NTC M12-L can be connected directly to most control units using a pull-up resistor (typically 1 or 3 kOhm).

Any mounting orientation is possible.

Please find further application hints in the offer drawing and free download of the sensor configuration file (*.sdf) for the Bosch Data Logging System at our homepage.

Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Legal Restrictions


Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

Ordering Information

Temperature Sensor NTC M12-L

Order number **0280.130.039**

Dimensions

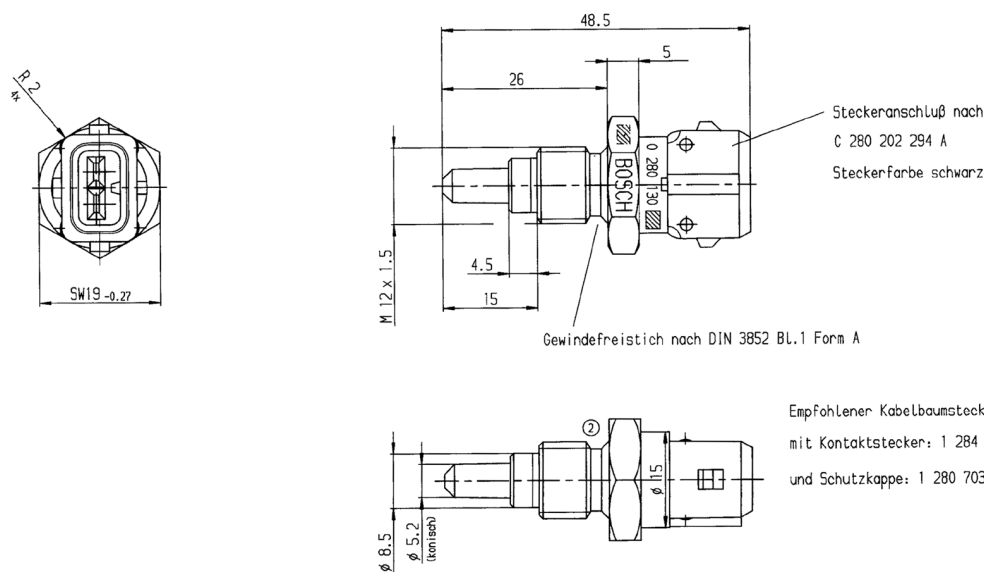

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
motorsport@bosch.com
www.bosch-motorsport.com

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsports Department
1-9-32 Nakagawachuo, Tsuzuki-ku
Yokohama-shi
Kanagawa, 224-8601
Japan
motorsport@jp.bosch.com
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
motor.sport@au.bosch.com
www.bosch-motorsport.com.au